



**INNOVATION & DESIGN**

**VISIBLY BETTER**



**2019 SPRING CATALOG**



## ► LEVELS - BOX LEVELS & I-BEAM

### 995 VULCAN™

Patented



- 3 solid acrylic epoxy locked vials, including:
  - 1 Plumb Site® Dual-View™ vial
  - 1 magnified horizontal solid acrylic vial
- 2 finely milled surfaces with V-Groove base up to 48" (120cm)
- Rubber shockproof end caps
- Magnetic models available (M)



Lengths: 24" (60cm) to 96" (250cm)

### 985 XL APOLLO™

Patented



- 3 solid acrylic epoxy locked vials, including:
  - 1 Plumb Site® Dual-View™ vial
  - 1 magnified horizontal solid acrylic vial
- 2 milled surfaces up to 48" (120cm)
- Shock absorbing bi-material end caps
- Magnetic models available (M)



Lengths: 24" (60cm) to 96" (250cm)

### 985 DOOR JAMB SET 78" & 32"

Patented

The classic Heavy Duty professional door jamb set offers so much that its competitors do not. These strong, robust levels have 3 solid acrylic vials with lifetime warranty on the accuracy, 2 milled surfaces on the 32 in. level and let's not forget the Dual-View Plumbsite feature, ergo grip non slip handles, and shock absorbing hand grips. What more could you want in a door jamb set?



- Plumb Site® Dual-View™ vial
- 3 solid acrylic vials on both the 32" level and the 78" level
- 2 milled surfaces on the 32" level
- Shock absorbing bi-material end caps
- Ergo grip non-slip handles
- Accuracy - 0.0005" (0.5mm/m) at level, and in all plumb working positions
- Rare-earth magnets



### 985 BATH & SHOWER SET 58" & 32"

Patented

The perfect tools for tiling a standard 5-foot tub.

- Includes 1x 58" Apollo Box Level, 1x 32" Apollo Box Level, soft side level case with strap
- 3 solid acrylic, epoxy locked vials, including:
  - 1 Plumb Site® Dual-View™ vial
  - 1 magnified horizontal solid acrylic vial
- 2 milled surfaces in the 32" (80cm)
- Shock absorbing bi-material end caps



## 905 CONDOR WITH OPTIVISION™

Patented



- 3 solid acrylic shockproof vials:
  - 1 OPTIVISION RED horizontal vial with gradient lines up to 2%
  - 1 Plumb Site® Dual-View™ vertical vial

- Shock absorbing end caps with wall grip feature
- Finely milled surface up to 48" (120cm)

- Magnetic models available (M)



Lengths: 24" (60cm) to 72" (180cm)



## LEVEL CARRYING CASE



**Case-24**  
24" Carrying Case with Handle

**Case-48**  
48" Carrying Case with Handle

## 781P GENESIS™

Patented



- Solid acrylic epoxy locked vials, including 1 Plumb Site® Dual-View™ vertical vial
- Horizontal vial with gradient lines up to 2%

- Finely milled surface up to 48" (120cm)
- Shock absorbing rubber end caps with wall grip feature



Lengths: 24" (60cm) to 72" (180cm)

## 170 SAMSON™

Patented



- 3 cylindrical vials (horizontal, vertical, optional (45°), including 1 Plumb Site® Dual-View™ vial
- 2 finely milled surfaces up to 48" (120cm)
- Heavy-duty aluminum frame

- Shock absorbing rubber end caps
- Ergonomic rubber handle

- Magnetic models available (M)




0.0017" (1mm/m)

Lengths: 24" (60cm) to 72" (180cm)

## 150 I-BEAM

Patented



- 3 cylindrical vials, including 1 Plumb Site® Dual-View™ vial
- Sturdy aluminum frame with V-groove base

- Shock absorbing rubber end caps
- Magnetic model (159) available in 24" & 48"

Lengths: 24" (60cm) to 72" (180cm)

## 130 I-BEAM



- 2 or 3 easy-to-read vials (horizontal, vertical, 45°)
- V-groove base for pipe/conduit

- Comfortable hand grip
- ABS end caps

Lengths: 24" (60cm) to 48" (120cm)



## ► LEVELS - TORPEDO & SPECIALTY

**229**



- 3 Cylindrical vials, including: horizontal, vertical, and 45°
- V-groove for pipes/conduit
- Magnetic base



Length: 9" (23cm)

### 929 TOOLBOX LEVEL

Patented



- 3 Cylindrical vials, including: horizontal, vertical, and 45°
- Leveling ledge for tiles/sills
- Magnetic V-groove for pipes/conduit
- Sturdy aluminum frame and base



Length: 10" (25cm)

### 935 OPTIVISION™ RED TORPEDO LEVEL

Patented



- Solid acrylic shockproof vials including:
  - Optivision™ Red horizontal vial with gradient lines up to 2%
  - Tilted horizontal epoxy locked vial for direct line of sight view
- Angle Finder with gradient markings every 15°
- Rare-earth magnets
- Finely milled surface with V-groove for pipe/conduit
- Shock absorbing end caps



Length: 10" (25cm)

### 724 CAST LEVEL



- 2 solid acrylic shockproof vials, including: horizontal & vertical
- Accuracy: <0.0005 in/in
- Milled surface
- Cast aluminum body
- **Magnetic model available (M)**
- 12 piece display available



Length: 10" (25cm)

### 227-08 / 227-08D



- 3 Cylindrical vials, including: horizontal, vertical, and 45°
- V-groove for pipes/conduit
- Magnetic base
- Rubber end caps



Length: 9" (23cm)



- Available in 20 piece display

### 923 CAST LEVEL

Patented



- 3 Solid acrylic vials, including:
  - Plumb Site® Dual-View™ vial
  - Epoxy locked horizontal vial
  - 45° Angle vial
- Accuracy: <0.0005 in/in
- Milled surface with Rare-earth magnets
- Heavy-duty cast aluminum body
- V-groove for pipes/conduit

Length: 10" (25cm)



### 925M TOPCLASS INDUSTRIAL LEVEL



- Anodized coated with anti-corrosion protection
- Epoxy locked vials x 4
- Extra strong rare-earth magnets
- Plumb Site vertical vial
- Horizontal vial, 45° vial, 30° vial
- Ruler
- V-groove for pipes
- Hanging strap



Length: 9" (23cm)



## 240 BULL'S EYE SURFACE LEVEL

- Multipurpose surface level
- Pre-cast holes for easy attachment
- Sensitivity: 30arc/min.



## 242 MAGNETIC CROSS SURFACE LEVEL

- Multipurpose surface level
- 2 Cylindrical vials
- Magnetic
- Pre-cast holes for easy attachment
- Sensitivity: 30arc/min.



## 245 MINI LEVEL WITH ANGLE FINDER

- 2 easy-to-read vials
- Angle Finder with patented Top-scroll Adjustment
- Pocket size
- Strong molded plastic casing



Length: 4" (10cm)

## 246 HANDY LEVEL

- Shockproof solid acrylic vial
- Lightweight aluminum box profile with shockproof end caps
- Available in 10 piece display
- Magnetic model available (M)



246-D  
246M-D



Length: 4" (10cm)

## 846-D CYCLOPS CAST LEVEL

Patented

- Plumb Site® Dual-View™ vial
- Durable cast aluminum body
- 2 finely milled surfaces with V-grooves
- Rare-earth magnets
- Fits in your pocket (4")



846-D



Length: 4" (10cm)

## 946M SMARTY LEVEL

Patented

- OPTIVISION™ Red horizontal vial
- Gradient lines
- Durable cast aluminum body with hand grips
- Rare-earth magnets
- Clip belt housing
- Precision: 0.0005 in/in (0.5mm/m)



946M-D



Length: 4" (10cm)

## 985D DIGIMAN®

Patented



- 2 Solid acrylic vials, including:
  - 1 Plumb Site® Dual-View™ vial
  - 1 horizontal vial
- Digital accuracy:  $<0.1^\circ$  at level and plumb,  $<0.2^\circ$  at other angles
- $45^\circ$  Tilted LCD display with backlight
- $180^\circ$  Readout - Readable when level is inverted
- HOLD function for transferring measurements
- MODE function (Degree/Percentage/Pitch)
- Memory recall - 9 measurements
- Buzzer at  $0^\circ$ ,  $45^\circ$ ,  $90^\circ$
- Recalibration function and "False Zero"
- Large silicone buttons, easy to use while wearing gloves
- Shockproof end caps
- 2 Finely milled surfaces
- Rare-earth magnets
- Battery indicator
- Water resistant padded case with accessory pouch and strap
- 9V battery included

### EASY TO CALIBRATE

1. Position the Digiman Level on a flat, smooth surface.
2. Press the Calibration button and hold for 2 seconds. The LCD will display "CAL 1" and then the measurement will flash.
3. Rotate the level  $180^\circ$  while keeping it flat on the smooth surface.  
Do not lift the level off the surface.
4. Once you have rotated the level, wait for 5 seconds and then press the Calibration button again and hold for 2 seconds.
5. The LCD will beep and display "CAL 2" and then display a level reading. The level is now calibrated and ready to use.

#### NOTE:

- If the LCD displays 3 dashes (- - -) after rotating the level  $180^\circ$ , this indicates that the level was not kept parallel to the flat surface during rotation. Start the calibration procedure again from Step 1.

\* We recommend checking calibration daily after a rough fall or if there has been a significant temperature change ( $\pm 30^\circ$ ) since the previous calibration.



Lengths: 24" (60cm) & 48" (120cm)





### A New Level of Visibility

**OPTIVISION™** is a Kapro invention that creates the effect of **strong color definition** around the spirit level's horizontal bubble, in stark contrast to the white vial background and clear liquid. The color contrast makes the bubble edges significantly easier to see, for fast and accurate placement between the vial's reading lines.

- **Highly visible red** bubble edge
- **Fast** placement between reading lines
- **Easy** viewing with tilted vial
- **Precise** leveling results

**VISIBLY BETTER**

## 992 DIGITAL BEVEL

- Adjustable blade locks at any angle
- Digital display flips when inverted
- False zero, easy recalibration



Length: 10" (25cm)

## ► LEVELS - MASONRY

### 930 SMARTCAST WITH OPTIVISION™

Patented



- 2 solid acrylic vials, including Optivision™ Red, horizontal vial with gradient lines up to 2%
- Shock absorbing rubber strike pads & end caps
- Finely milled surface

Lengths: 16" (40cm), 24" (60cm), & 32" (80cm)

### 920 SHARK®

Patented



- 2 solid acrylic vials, including 1 Plumb Site® Dual-View™ vial
- Horizontal with gradient lines up to 2%
- 2 shock absorbing rubber strike pads
- Finely milled surface

Lengths: 24" (60cm) & 32" (80cm)

### 720 SUPERCASE™



- 2 solid acrylic vials
- Finely milled surface
- Heavy-duty cast aluminum tapered (trapezoid) body

Lengths: 12" (30cm), 16" (40cm) & 24" (60cm)

### 105 TOPGRADE GRADIENT LEVEL

Patented



- Solid acrylic horizontal vials (3 to 5 vials depending on the length of the level) + 1 vertical vial

- Accurate slope measurement at up to 2%
- Milled surface
- Magnetic models available (M)



24" 3 + 1 vials

48" 5 + 1 vials

Lengths: 24" (60cm) & 48" (120cm)

### 121 BAMBOO LEVEL

Patented



- Durable Bamboo, reinforced with heavy duty extruded aluminum frame
- Solid acrylic vials - Individually calibrated to 0.00075 in/in for maximum accuracy

- Impact resistant, UV and fogging protected
- Improved shock absorbing cast rubber end caps
- Laminated for extra dimensional stability and easy cleaning



Lengths: 24" (60cm) & 48" (120cm)



## ► LEVELS - SPECIALTY

### 341 MINI POST LEVEL



- 3 vials
- Adjustable elastic strap for non-magnetic surfaces
- 4 powerful magnets for magnetic surfaces
- For use with all posts, pipes, and signs

341-D

### 340 POSTRITE® FOLDING POST LEVEL

Patented



- 3 vials
- Folds closed, opens flat
- Click-lock every 15°
- 4 magnets & adjustable elastic strap



340-08D

### 350 PIPE LEVEL - 5 PIECE SET



- For standard metal and plastic pipe sizes (see table)
- 2 easy-to-read vials - vertical and horizontal

Nominal Sizes	IPS Steel Stainless Steel PVC Plastic Inches / mm	CTS Copper Inches / mm	PP Plastic Inches / mm
1/2"	1/2 15	3/4 20	25
3/4"	3/4 20	1 25	32
1"	1 25	1 1/4-1 1/2 32-40	40
1 1/4" - 1 1/2"	1 1/4-1 1/2 32-40	-	50
2"	2 50	-	63

### 325 MAGNETIC LOCK COMBINATION SQUARE



- Magnetic lock - no screws
- Stainless steel ruler
- Heavy-duty cast zinc body with vial
- 5 milled sides


Length: 12" (30cm)

### 301 T-BEVEL






- 3/4" (5mm) trim gauge on side and bottom
- Stainless steel blade

## 316 DRYWALL T-SQUARE

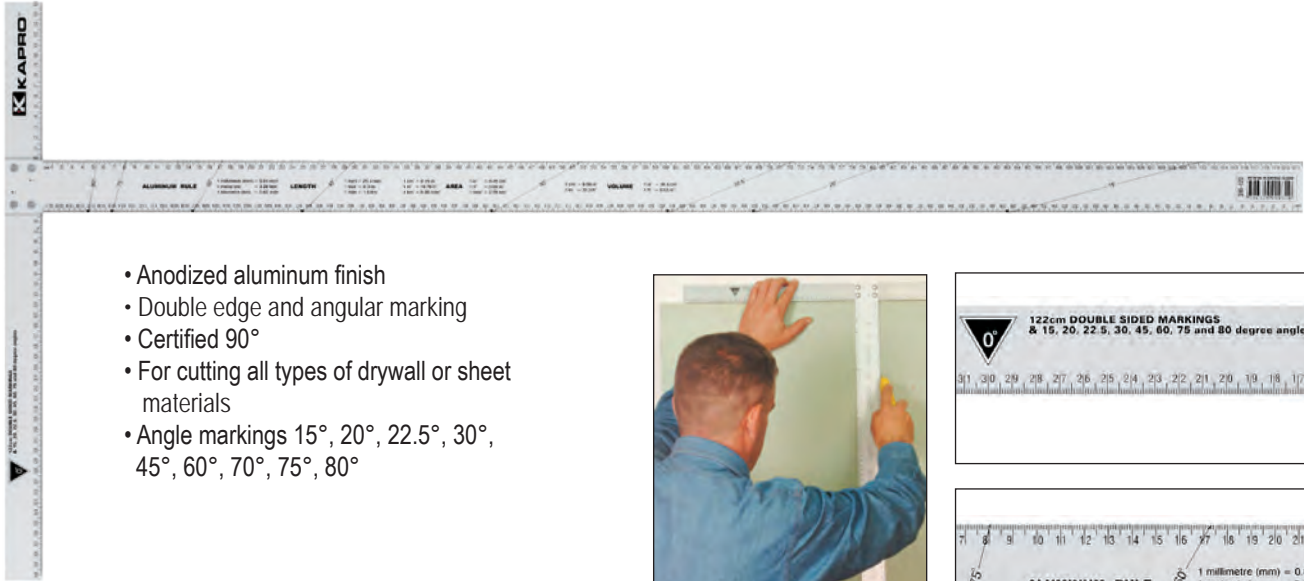


- Anodized aluminum finish
- Double edge and angular marking
- Certified 90°
- For cutting all types of drywall or sheet materials
- Angle markings 15°, 20°, 22.5°, 30°, 45°, 60°, 70°, 75°, 80°

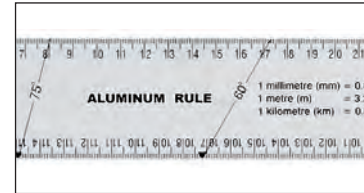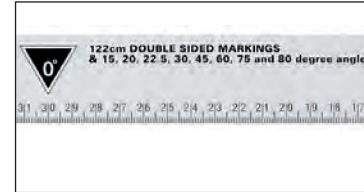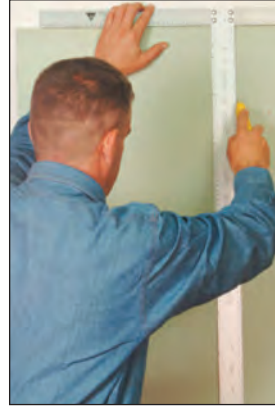

Length: 48"

## 317 ADJUSTABLE T-SQUARE

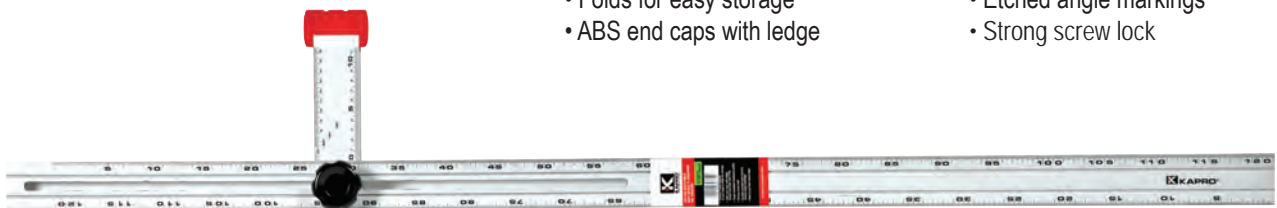

- Anodized aluminum finish
- Sliding head adjusts to any angle
- Folds for easy storage
- ABS end caps with ledge


- Double edge heavy duty blade
- Durable printed scale
- Etched angle markings
- Strong screw lock

LEDGE FOR  
HANDS FREE HOLD



Length: 48"

## 305 FRAMING SQUARE

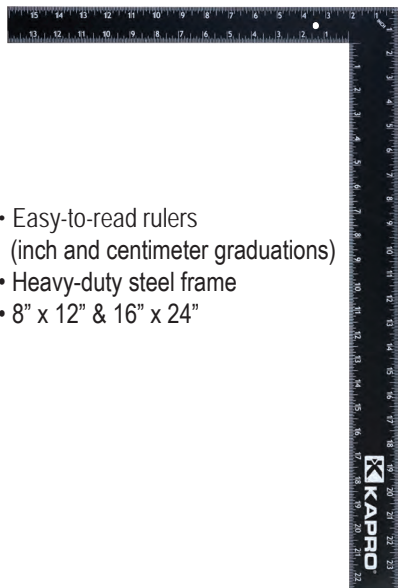

- Easy-to-read rulers (inch and centimeter graduations)
- Heavy-duty steel frame
- 8" x 12" & 16" x 24"

Lengths: 12" & 24"

## 306 RULER



- Anodized aluminum ruler
- Durable printing
- Wear resistant UV cured screen printing
- Printed scale accurate to 0.7mm/m
- 1.2" (3cm) width


Lengths: 12" & 36"

## 302 STAIR GAUGE

- Solid brass construction
- For use with framing square
- For stair layout and any other repeat marking



## 309 LEDGEND™ SQUARE

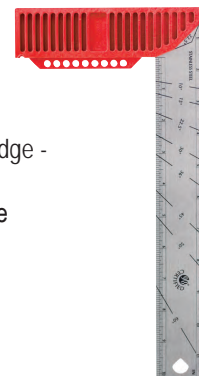

- Unique support ledge - hands-free hold
- Certified 90° angle

Lengths: 8" & 12"

## 307 TRY & MITRE SQUARE



- Solid riveted construction
- Permanently etched markings in inches and centimeters
- Machined aluminum handle
- Certified 90°

Lengths: 8" & 12"

## 308 STRAIGHT EDGE



- Contractor grade
- Anodized aluminum
- Wear-resistant UV cured screen printing
- Printed scale accurate to 0.7mm/m
- 2" (5cm) width

Lengths: 24" & 48"

## 444 RAFTER SQUARE 7"

- Durable & lightweight Ergocast™ material
- Molded-in conversion tables
- Easy-to-read graduations
- Base enables easy marking and cutting





## ► LASER LEVELS

### 862G PROLASER® CROSS LINE LASER

Indoor green cross-line laser




Magnet

Hanging hole

"Velcro" strap slot

V-Groove

Magnet



Battery cover opening

Tripod thread  
1/4"




Manual Mode button

On/Off switch

1.77" (4.5cm)  
4.15" (10.5cm)





## INDOOR AND TILT MODE

- Vertical, horizontal and cross beams
- Indoor laser range: 65' (20m)
- Accuracy: 1/4" @ 50' (0.4mm/m)
- Self-leveling range  $\pm 3^\circ$
- Manual mode for angular layout / tilted marking
- Visual "Out of level" warning
- Tripod ready: 1/4" thread
- V-grooved
- Rare earth magnets
- "Velcro" strap slot
- Hanging hole

Includes

- Soft carry case, Velcro strap

Applications

- Tiling
- Cabinet installation
- Hanging curtains
- Framing, trim carpentry, and picture hanging



## ► LASER LEVELS

### 870G VHX PROLASER® VIP

Indoor/outdoor shielded green cross-line laser

Manual Mode

Beam Selector

Pulse/Outdoor Mode

**IP65**

Keypad

Shock resistant  
rubber casing

Laser projector  
window  
Horizontal & Vertical



Tripod thread  
1/4"




On/Off switch



**894-04G  
Laser Detector**  
For outdoor work (sold separately)





## INDOOR AND TILT M O D E

- Horizontal and vertical cross lines at 90°
- Indoor laser range: 100' (30m)
- Outdoor laser range with detector: 200' (60m)
- Accuracy: 1/8" @ 50' (0.2mm/m)
- Self-leveling range  $\pm 3^\circ$
- Manual mode
- Audio and Visual "Out of level" warning
- Pulse mode
- Water and dust proof (IP65)
- Protective rubber over molded casing
- Tripod ready: 1/4" thread

### Includes


- Laser target, universal wall mount (886-23), tripod adaptor for 5/8" thread (841), batteries, and a soft carry bag

### Applications

- Tiling
- Deck installation and exterior layout
- Door and window installation

### Optional:

- Lightweight tripod (886-28)
- Green Laser detector (894-04G)



## ► LASER LEVELS

### 872G VHX PROLASER® PLUS GREEN

Free standing green cross-laser

Manual Mode

Beam Selector

Pulse/Outdoor Mode

Keypad

Shock resistant  
rubber casing

Laser projector window  
Horizontal & Vertical

On/Off  
switch



Tripod thread  
1/4"



Strong folding legs for angle  
mounting and height adjustment

Anti-slip grips



**894-04G  
Laser Detector**

For outdoor work (sold separately)



## INDOOR OUTDOOR AND TILT MODE


- Intersecting horizontal and vertical beams at 90°
- Laser range:
  - Indoor: 100' (30m)
  - Outdoor with detector: 200' (60m)
- Accuracy: 1/8" @ 50' (0.2mm/m)
- Self-leveling range  $\pm 3^\circ$
- Manual mode for angular layout / tilted marking
- Audio and Visual "Out of level" warning
- Pulse mode
- Strong folding legs for angle mounting
- Shock resistant rubber casing
- Tripod ready: 1/4" thread

### Includes

- Pouch and tripod adaptor for 5/8" thread (841)

### Applications

- Aligning tiles, cabinets, borders, moldings and trims
- Door and window installation





## ► LASER LEVELS

### 873G PROLASER® GREEN VECTOR

Three intersecting laser beams





## INDOOR OUTDOOR AND TILT MODE

- 3 Laser beams including:
  - 1 horizontal
  - 2 vertical (with a 90° intersection)
- Laser range:
  - Indoor: 100' (30m)
  - Outdoor with detector: 200' (60m)
- Accuracy: 1/8" @ 50' (0.2mm/m)
- Self-leveling range  $\pm 3^\circ$
- Manual mode for angular layout / tilted marking
- Audio and Visual "Out of level" warning
- Pulse mode
- Strong folding legs for angle mounting
- Shock resistant rubber casing
- Tripod ready: 1/4" thread


### Applications

- Aligning tiles, cabinets, borders, moldings and trims
- Door and window installation



## ► LASER LEVELS

### 875G PROLASER® ALL LINES

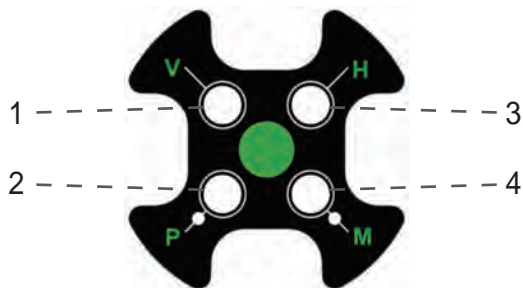

Keypad

Surface level

Vertical laser output window x 4

Horizontal laser output window


Graduated scale

Adjustable support legs



Micro USB port

Fine adjustment knob




**894-04G  
Laser Detector**

For outdoor work (sold separately)



Tripod  
thread 5/8"



## INDOOR OUTDOOR AND TILT MODE

- 5 Laser beams including:
  - 1 horizontal
  - 4 vertical (with a 90° intersection on the ceiling)
- 1 Plumb dot
- Laser range:
  - Indoor: 100' (30m)
  - Outdoor with detector: 165' (50m)
- Accuracy: 1/8" @ 50' (0.2mm/m)
- Self-leveling range  $\pm 2.5^\circ$
- Manual mode for tilted marking
- Audio and Visual "Out of level" warning
- Pulse mode
- Rechargeable Lithium battery
- Bullseye surface level
- Micro USB Port charging
- Fine adjustment knob
- Tripod ready: 5/8" thread

### Includes:

- Beamfinder™ glasses, laser target, rechargeable lithium battery and soft carry case

### Applications

- Setting floor and wall tiles
- Drywall, deck, and acoustic ceiling installation
- Framing and aligning windows and doors



Lithium battery





## ► LASER LEVELS

### 883G PROLASER® 3D ALL-LINES - GREEN

360° beams in every direction - Indoor & Outdoor Use




#### 894-04G

##### Laser Detector

For outdoor work (sold separately)



Hard carry case, multi-functional magnetic mount, laser target, green Beamfinder™ glasses, battery charger and lithium-ion battery



## INDOOR OUTDOOR AND TILT MODE

- Three 360° Laser beams including:
  - Horizontal
  - Side vertical
  - Forward vertical
- Laser range:
  - Indoor: 65' (20m)
  - Outdoor with detector: 230' (70m)
- Accuracy: 1/8" @ 50' (0.2mm/m)
- Self-leveling range  $\pm 3^\circ$
- Manual mode for tilted marking; Pulse mode
- Tripod ready: 1/4" & 5/8" thread

### Includes

- Lithium-ion battery, battery charger, green Beamfinder™ glasses, laser target, multi-functional magnetic mount and hard carry case

### Applications

- Accurately laying out right angles for flooring, drywall installation and deck construction
- Leveling slopes (manual mode)
- Acoustic ceiling installations
- Framing and aligning windows and doors



Lithium battery



## 899R PROLASER® SELF-LEVELING ROTA-LINE

Protective shock absorbing cover

Rotating head

Laser window

Control panel

Carrying handle




Tripod thread 5/8"



### Control Panel

1. Power indicator
2. Low battery indicator
3. Manual mode indicator
4. Power button
5. Rotation speed control
6. Scanning mode control
7. Manual/Automatic mode
8. Increase X axis slope control (manual mode only)
9. Reduce X axis slope control (manual mode only)
10. Increase Y axis slope control (manual mode only)
11. Reduce Y axis slope control (manual mode only)
12. Clockwise direction control (scan mode only)
13. Counterclockwise direction control (scan mode only)
14. Remote control sensor

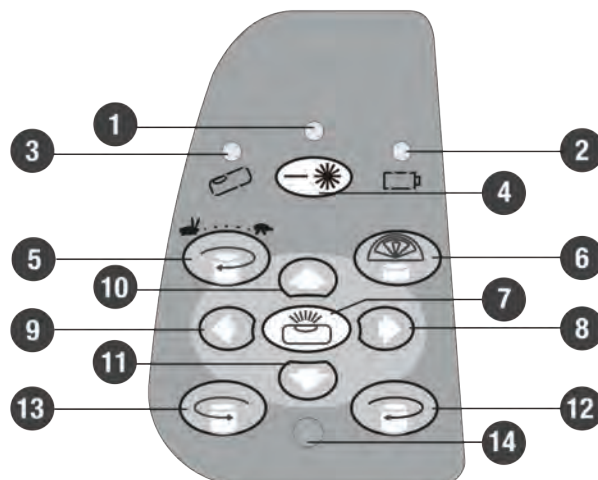





## INDOOR OUTDOOR AND TILT MODE

- Horizontal or vertical 360° rotating beam
- Plumb Down and Plumb Up points
- Five variable speeds (0, 60, 120, 300, & 600 rpm)
- Six scan modes create visible laser line
- Laser range:
  - Indoor: 165' (50m)
  - Outdoor with detector: 800' (250m)
- Accuracy: 1/8" @ 100' (0.1mm/m)
- Electronic self-leveling range  $\pm 5^\circ$
- Manual leveling for marking slopes of up to  $\pm 5^\circ$  in both X and Y planes
- "Out of range" indicator
- Tripod ready: 5/8" thread

### Includes:

- Remote control, laser detector, Beamfinder™ glasses, rechargeable Ni-MH batteries and battery charger - AC/DC converter, and Shockproof case

### Applications

- Laying foundations
- Wall, fence, and deck construction
- Laying water and sewage lines
- Drywall, partitions and acoustic ceiling installations



**Ni-MH**  
Battery  
Included

**9V**  
Not Included

For laser  
detector

**2 AAA**  
Not Included

For remote  
control

**THREE**  
WARRANTY  
YEAR





## ► LASER ACCESSORIES

**840**

Beamfinder™ Glasses



- Enhances visibility of laser beam

**840G**


Beamfinder™ Glasses



- Enhances visibility of laser beam

**894-04**

Red Laser Beam Detector



- For use with Pulse enabled laser tools for extended ranges
- 9V battery required (not included)

**845**

Red Laser Target



- Magnetic
- Special reflective surface
- Graduated target (in/cm)

**845G**

Green Laser Target



- Magnetic
- Special reflective surface
- Graduated target (in/cm)

**894-04G**

Green Laser Beam Detector



- For use with Pulse enabled laser tools for extended ranges
- 9V battery required (not included)

**886-23**

Universal Wall Mount



- Screw hang hole, strap, or magnetic mount
- 1/4" laser mounting screw

**886-24**

Multi-functional Magnetic Mount



- Screw hang hole, clip, or magnetic mount
- Locks for stability
- Quick adjust or micro-adjust
- 1/4" laser mounting screw

## ► TRIPODS

### 886-28

Tripod for Laser Level



886-28

### 886-48

Tripod for Laser Level



886-48

- 886-28 Lightweight tripod  
- up to 4ft (1.2m), with vial
- 886-48 Professional tripod  
- up to 7.5ft (2.32m) with scale and vial

### 886-30

Extendable Pole for Laser Level



- Self-clamping between floor and ceiling
- 10ft (3.2m) maximum height
- Includes adjustable laser mount with 5/8" UNC thread

### 886-58

Pole with Tripod



- Telescoping pole with locking section
- 10.5ft (3.2m) maximum height
- Strong lightweight tripod stand with surface level
- Adjustable laser mount with 5/8" UNC thread

### 841

Tripod Adaptor

- Converts tripod thread from 5/8" to 1/4" UNC



### 985 DIGIMAN 9 PC. DISPLAY



9 piece metal display designed to hold Digiman Levels in carrying bag.  
Ready to assemble.

### 905 OPTIVISION 30 PC. DISPLAY



30 piece metal display designed to highlight and hold Optivision Levels and other Kapro items.  
Ready to assemble.

### 990 METAL 12 PC. DISPLAY



12 piece metal display designed for a variety of models and sizes of Kapro Levels.  
Ready to assemble.

### 846-D CYCLOPS

10 piece cardboard display  
Dimensions:  
4.5" (w) x 10" (d) x 5.1" (h)



### 227-08D TOOLBOX LEVEL DISPLAY

20 piece cardboard display  
Dimensions:  
11.4" (w) x 9.45" (d) x 11" (h)



### 724-D CAST TOOLBOX DISPLAY

12 piece cardboard display  
Dimensions:  
12" (w) x 9.45" (d) x 2" (h)



### 340-08D POSTRITE® DISPLAY

6 piece cardboard display  
Dimensions:  
7.7" (w) x 7.7" (d) x 9.45" (h)



### 341-D POST LEVEL DISPLAY

12 piece cardboard display  
Dimensions:  
8.6" (w) x 7.9" (d) x 3.4" (h)





# BANNERS / HEADER SIGN / LASER WALL & FLOOR DISPLAYS



**64195**  
Kapro banner  
48" (w) x 36" (h)




**64194**  
Digiman banner  
30" (w) x 14" (h)



**KABANNER**  
Kapro banner  
48" (w) x 12" (h)



**64193**  
Kapro Header sign  
24" (w) x 9" (h)

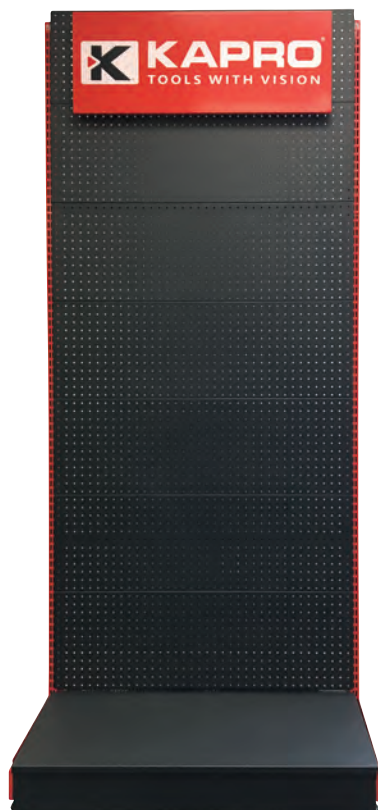

**KAW40**  
Pegboard Display  
**KAW40S**  
Pegboard shelf (not shown)



**Laser Hanging Display**  
Component part#s:  
64200 - Header  
64201 - 2' x 2' Wire grid panel  
64202 - Steel shelf with card holder  
64203 - Peg hooks  
(2 grid panels shown; Products not included)




**886-59**  
Pole Laser Display  
(Products not included)






## **Plumb Site® Dual-View™ Vial**

Unique front view of the vertical vial



### **Precision**

< 0.0005"/" (0.5mm/m) in all positions




### **Accuracy**

Solid acrylic vials are individually calibrated




### **Solid Acrylic Shockproof Vials**

Superior accuracy, readability, and longevity



### **Magnified Vial**

Better readability



### **UV Resistant**

Protected from the fading effects of sunlight



### **Magnetic**

Powerful magnetic surface for accurate hands-free leveling



### **Shockproof End Caps**

Protects the level's integrity and accuracy



### **Lifetime Vial Warranty**

Solid acrylic vials are guaranteed not to fog, leak, or break



### **Angle Finder**

Transfer angle measurements



## **VPA**

Vial accuracy certified by the German VPA laboratory

## INDEX

### BOX LEVELS

781	Genesis	Pg. 3
905	Condor	Pg. 3
985	Apollo	Pg. 2
	Apollo Door Jamb Set	Pg. 2
	Apollo Shower/Bath Set	Pg. 2
995	Vulcan	Pg. 2

### I-BEAM LEVELS

130	Project I-Beam	Pg. 3
150	I-Beam with Plumb Site	Pg. 3
170	Samson	Pg. 3

### CARRY CASES

Pg. 3

### TORPEDO LEVELS

227	9" Toolbox level w/end caps	Pg. 4
229	9" Toolbox level	Pg. 4
724	10" Cast toolbox	Pg. 4
923	10" Cast toolbox w/Pl. Site	Pg. 4
925	9" Industrial/Electrician's	Pg. 4
929	10" Toolbox w/Pl. Site	Pg. 4
935	10" Optivision Red	Pg. 4

### SPECIALTY LEVELS

240	Bull's Eye surface level	Pg. 5
242	Cross level	Pg. 5
245	Mini-Level	Pg. 5
246	Handy level	Pg. 5
301	T-Bevel	Pg. 9
325	Combination square	Pg. 9
340	Postrite post level	Pg. 9
341	Mini post level	Pg. 9
350	Pipe level set	Pg. 9
846	Cyclops pocket level	Pg. 5
946	Smarty level w/Optivision	Pg. 5

### MASONRY LEVELS

105	Topgrade gradient levels	Pg. 8
121	Wood levels	Pg. 8
720	Supercast levels	Pg. 8
920	Shark levels	Pg. 8
930	Smartcast levels	Pg. 8

### DIGITAL LEVELS

985D	Digiman	Pg. 6
992	Digital bevel	Pg. 7

### LAYOUT, MARKING, MEASURING

301	7" T-Bevel	Pg. 9
302	Brass stair gauges	Pg. 11
305	Steel carpenter square	Pg. 11
306	Aluminum rulers	Pg. 11
307	Try & Mitre square	Pg. 11
308	Aluminum straight edge	Pg. 11
309	Ledgend Try & Mitre sq.	Pg. 11
316	Drywall T-square	Pg. 10
317	Adjustable drywall T-sq.	Pg. 10
444	Ergocast rafter square	Pg. 11

### LASER LEVELS

862G	Cross line	Pg. 12
870G	VHX cross line	Pg. 14
872G	2 Beam Green cross	Pg. 16
873G	3 Beam Green vector	Pg. 18
875G	All lines	Pg. 20
883G	3D All lines	Pg. 22
899R	Self-leveling Rota-Line	Pg. 24

### LASER ACCESSORIES

840	Red beam-finder glasses	Pg. 26
840G	Green beam-finder glasses	Pg. 26
841	Tripod adaptor	Pg. 27
845	Red laser target	Pg. 26
845G	Green laser target	Pg. 26
886-23	Universal wall mount	Pg. 26
886-24	Multi-functional mount	Pg. 26
886-28	Tripod (lightweight)	Pg. 27
886-30	Extendable pole	Pg. 27
886-48	Tripod (professional)	Pg. 27
886-58	Pole with tripod	Pg. 27
894-04	Red laser beam detector	Pg. 26
894-04G	Green laser beam detector	Pg. 26

### DISPLAYS & MERCHANDISING Pg. 28 & 29



WORLD CLASS TOOLS SINCE 1876

Phone: 800-472-8273 | Fax: 800-582-8273  
2452 Quakertown Rd., Suite 300  
Pennsburg, PA 18073  
[www.ustape.com](http://www.ustape.com)  
[www.kapro.com](http://www.kapro.com)